



شرکت مهندسی و بازرگانی خلیل
آتش نشانی، ایمنی و امداد



TKW GmbH
ARMATUREN

TKW NOZZLE SF 400 TURBO



DESCRIPTION

- Combination (Fog) Nozzle according to DIN EN 15182-2 Cat. 3
- Selectable Flow at 6 bar working Pressure: 60 - 130 - 235 - 400 l/min
- Weight: 2.2 kg
- Made in Germany


ADVANTAGES

- Available with spinning turbo wheel for fine droplets in hollow narrow spray cone
- Rugged aluminum construction
- Ergonomically wide, powder-coated handle with open-close labeling.
- Ball shut-off valve with 35mm passage
- Inlet connection 2 ½ BSP

Vollstrahl



Sprühstrahl

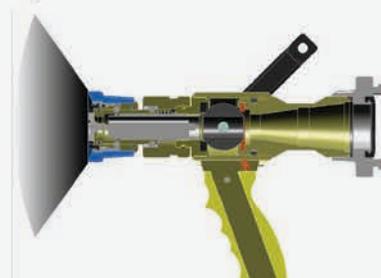

تهران، میدان هفت تیر، خیابان لطفی، پلاک ۲۰، واحد ۲
تلفن: ۰۲۱)۸۸۸۱۶۰۲۳ (فکس: ۰۲۱)۸۸۸۱۶۱۳۹

WWW.KHALILENG.COM
info@khalileng.com